SPECIFICATIONS – PR2402287R Page 1 of 4

ITEM NO.	DESCRIPTION	CHECK ✓ IF AS SPECIFIED	DESCRIBE FULLY IF NOT AS SPECIFIED
	NEW SIMTEK Modular Shoot House Kit #4 – STD or Equal (Configuration example below)		
1	General:		
1.1	Size: Material to create minimum 2,400 SQ Feet residential decoy (example see page. 4)		
1.2	Professionally engineered		
1.3	Plywood construction - reconfigurable, window, and door panels		
1.4	Set up & reconfigurable with minimum of 2 staff		
1.5	Assembly tools required		
1.6	Indoor or outdoor use		
1.7	Can be set up on any flat surface		
1.8	Adjustable & reconfigurable points of entry		
1.9	Simunition tested 15+ years of force on force training use		
	Minimum 19 doorways		
	Minimum 12 simulated windows		
	Easily stackable for storage		
	Includes instructional video (self installation) & manual required		
	Has ability for modification of rooms without losing dimensions		
2	Panels:		
	Reenforced CDX treated plywood, unpainted		
	Perfectly squared and free of flaws		
	Must not flex		
	48" wide x 8' tall x 2 1/2" thick (full panels)		

SPECIFICATIONS – PR2402287R


	Page 2 of 4	
	24" wide x 8' tall x 2 1/2" thick (half panels)	
	Maximum weight of 100 lbs/sheet	
	Interchangeable	
	Minimum of 15 ea door panels	
	Door panels are ready to receive any style of a standard 30 inch residential door.	
	Window panel size: minimum of 3' wide x 4' high located 6" from the top and centered	
	Panels available for separate purchase	
3	Doors:	
	Minimum of 15 Pre-hung wood, residential standard 30 inch doors	
	Minimum of 8 left with knobs	
	Minimum of 7 right with knobs	
4	Breaching Door for residence:	
	Solid wood breeching door with smash plates/handle	
	Fits in place of any standard 48" panel location	
	Uses 1/2" wooden dowels to defeat	
5	Brackets:	
	Heavy duty 12-gauge steel	
	Powder coated	
	Securely connect walls without permanent attachment, easy setup, takedown, and reconfiguration	
	Quick Connector Bracket Sets or equal	
	148 straight	
	16 corner	
	46 tee	

SPECIFICATIONS – PR2402287R

Page 3 of 4

1		1	1
	10 end		
	4 cross		
	4 short wall		
6	Spacer Posts:		
	Durable		
	Minimum of 125 posts		
7	Warranty:		
	Minimum 12 months or more		
8	Delivery:		
	Must be delivered 90 days ARO		
	Include delivery cost in the bid		
	DOC staff will offload		

SPECIFICATIONS – PR2402287R Page 4 of 4

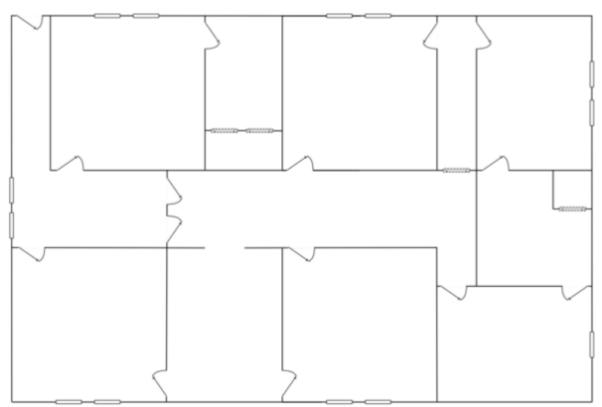

EXAMPLE